


Wall Mounted /Hanging/Water Softener for Bathing / Washing and for RO Machines

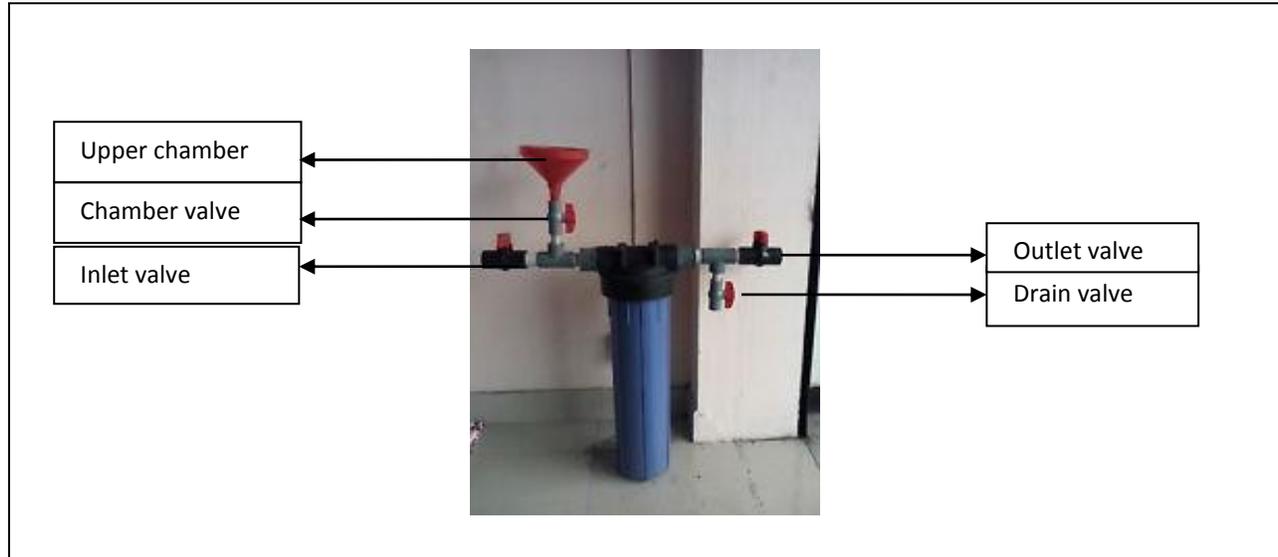

Regeneration process

- After 1000 liters usage of water (based on hardness of water) regeneration is required to bring softener resin to its full power of water softening.
- Before starting the process dissolve 1 packet of stone salt in the water completely.
- At first close the inlet water valve and also close the outlet valve, and then open the chamber valve and pour the dissolved salt water in to it .Finally open the drain valve 10%,for air gap .
- At least wait for 15 minutes, therefore salt will react with the lower resin for 10 minutes, and then open the drain valve completely and allow the water to pass through outside for 5 minutes [Note: this is a waste salt water ,drain it to the waste line].
- Now open the inlet valve and allow the water to pass through the drain valve for 5 minutes to drain out the salt water completely. At last open the outlet valve for soft water and close the drain valve.
- Now the softener ready for use after regeneration.